


NATURESTRIP TO BE REINSTATED
 WITH 75mm SANDY LOAM, PLANTED
 WITH GRASS SEED, AND ROLLED.
 (33%-EXPRESS, 33%-DASHER, 33%-DUET)
 @ 30 GRAMS PER SQUARE METRE.

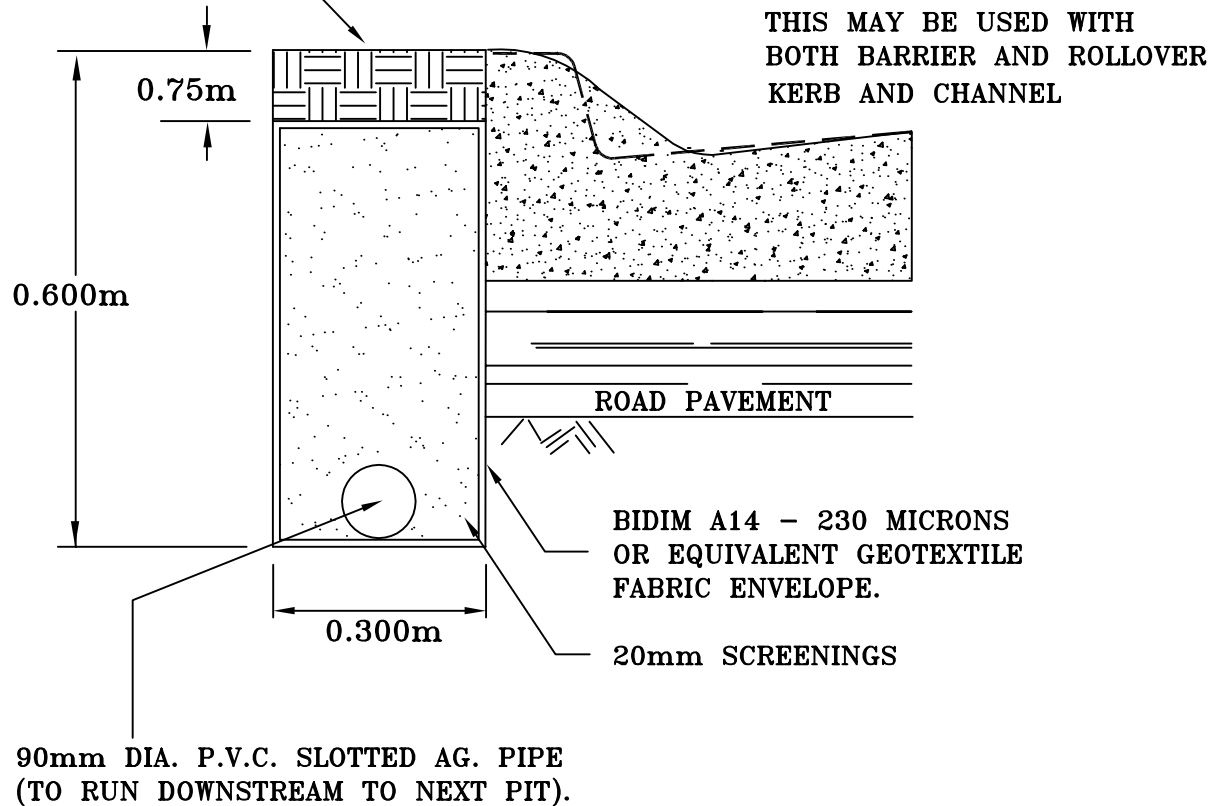

NOTE:-
 INSTALL 90mm DIA. P.V.C. (NOT SLOTTED)
 UNDER CONCRETE DRIVEWAYS.
 BORING WILL BE REQUIRED.
 IF UNDERGROUND POWER CROSSES BORE
 LINE, A DEPTH HOLE MAYBE DUG IN FRONT
 OF KERB & CHANNEL IN ROAD PAVEMENT
 TO CHECK CONFLICT OF LEVELS.
 NO FILTER MATERIAL IS REQUIRED
 UNDER DRIVEWAY.

CITY OF BALLARAT

1	DWG No. & DIMENSION	10/11/98
2	DIMENSION & NOTES	18/01/99
No.	AMENDMENTS	DATE

Approved by:

Date:

SUB-SOIL DRAINAGE
 BEHIND KERB & CHANNEL



SCALE:
 NOT TO SCALE

SHEET 1 OF 2

DRAWING NO:
 SD-D2-1