



- NOTE:
1. COMPACTED BACKFILL TO BE CLASS 3 F.C.R.
  2. HAUNCH ZONE TO BE 20mm AGGREGATE MATERIAL AS SPECIFIED.
  3. BEDDING ZONE TO BE CLASS 3 F.C.R. COMPACTED DEPTH TO BE 150mm.
  4. ALL DIMINSIONS ARE IN MILLIMETERS.

**A. ROAD PAVEMENT**

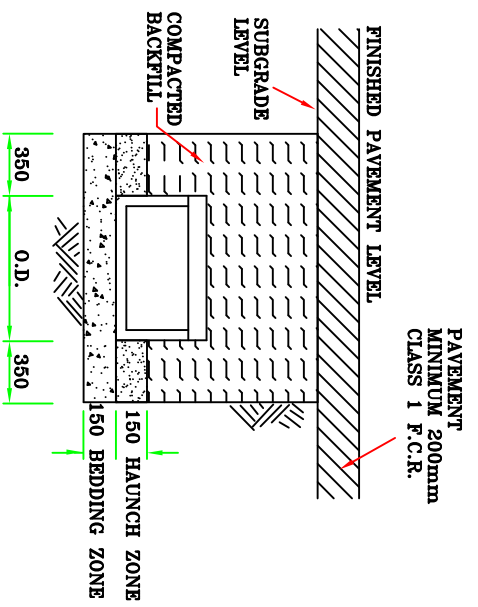

- NOTE:
1. COMPACTED BACKFILL TO BE RED DREDGE GRAVEL.
  2. HAUNCH ZONE TO BE 20mm AGGREGATE MATERIAL AS SPECIFIED.
  3. BEDDING ZONE TO BE CLASS 3 F.C.R. COMPACTED DEPTH TO BE 150mm.
  4. BACK OF KERB 100mm SOIL INSTEAD OF CLASS 1 F.C.R. UNLESS OTHERWISE SPECIFIED.
  5. ALL DIMINSIONS ARE IN MILLIMETERS.

**B. ROAD SHOULDERS**

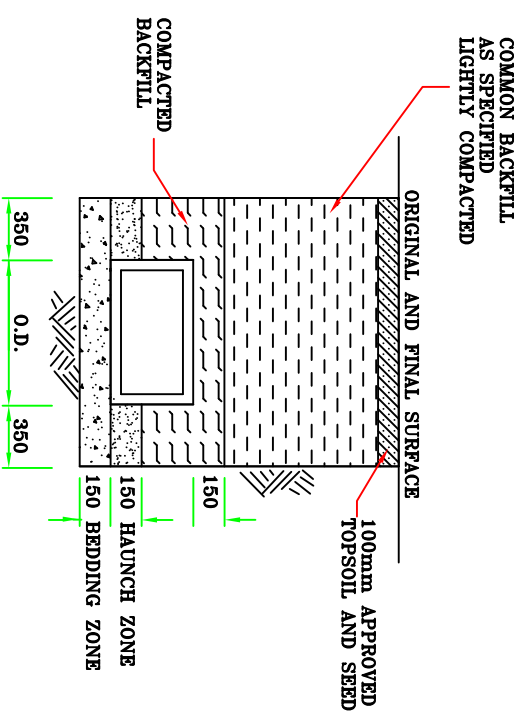

- NOTE:
1. COMPACTED BACKFILL TO BE RED DREDGE GRAVEL.
  2. HAUNCH ZONE TO BE 20mm AGGREGATE MATERIAL AS SPECIFIED.
  3. BEDDING ZONE TO BE CLASS 3 F.C.R. COMPACTED DEPTH TO BE 150mm.
  4. ALL DIMINSIONS ARE IN MILLIMETERS.

**C. NATURESTRIPS**

COMPUSORY MEASURES FOR THE PROTECTION OF TRENCHES 1.5m OR MORE IN DEPTH ARE TO COMPLY WITH THE REQUIREMENTS OF THE MINES ACT 1958, THE OCCUPATIONAL HEALTH AND SAFETY ACT, ALL OTHER RELEVANT REGULATIONS, AND MUST INCLUDE THE NOMINATION OF A MANAGER OF THE TRENCH.

**CITY OF BALLARAT**

Approved by:

No.	AMENDMENTS	DATE

Date:

**TRENCH DETAILS FOR  
R.C. BOX CULVERTS**



CITY OF BALLARAT

SCALE:  
NOT TO SCALE

SHEET 3 OF 3

DRAWING NO:  
SD-D8-3