


50mm DIA PIPE

APPROVED BRACKET TO BE USED ON ALL INSTALLATIONS.

NOTES:

- HAZARD MARKERS OR LATERAL SHIFT MARKERS, TO BE NO LESS THAN 600mm FROM THE BOTTOM OF THE SIGN TO THE FINISHED SURFACE LEVEL
- ** THIS DOES NOT APPLY IF THE DRIVERS LINE OF VISION IS IMPAIRED BY THE HEIGHT OF THE SIGN
- HAZARD MARKERS / LATERAL SHIFT MARKERS ARE TO HAVE UNI-STRUT BRACING EXCEPT WHEN THEY ARE TO BE SPECIFICALLY SHAPED TO SUIT SITE CONDITIONS.
- ALL SIGNS NOMINATED TO BE WITHIN HIGH VANDALISM AREAS ARE TO BE BRACED WITH UNI-STRUT

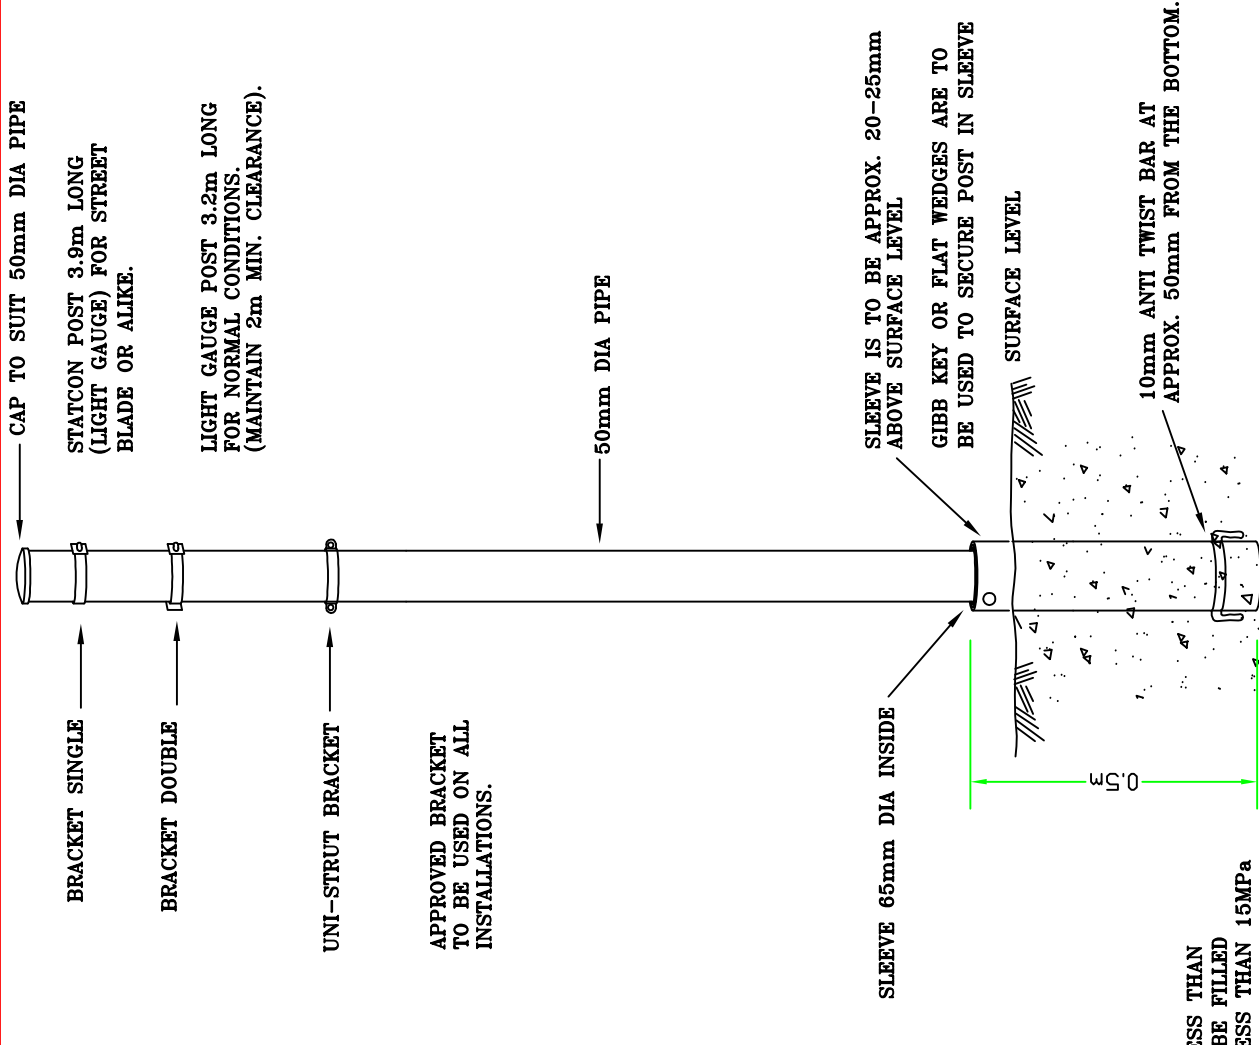

HOLE IS TO BE NO LESS THAN 125mm DIA, AND TO BE FILLED WITH CONCRETE NO LESS THAN 15MPa

CITY OF BALLARAT

Approved by:-

No. AMENDMENTS	DATE

SIGN POST DETAIL

