



NOTES:

1. CONCRETE FOR PEDESTRIAN RAMP TO BE 125mm THICKNESS ON 75mm CLASS 3 FINE CRUSHED ROCK, WITH F72 REINFORCED MESH.
2. 10mm DEFORMED BARS TO BE DOWELLED A MIN 150mm INTO PEDESTRIAN CROSSING, AND 150mm INTO KERB AND CHANNEL AT 350mm CENTRES.
3. THE RAMP AND SLOPING SIDES SHOULD BE SLIP RESISTANT. USE BROOM SURFACE FINISH.
4. REFER TO A.S.1428.1 AND A.S.1428.4 FOR PROFILE AND CORRECT PLACEMENT OF TGSI'S.
(IF CONFLICT OCCURS BETWEEN COUNCIL'S STANDARD DWG AND AUSTRALIAN STANDARDS, DEFER TO AUSTRALIAN STANDARD.)
5. TACTILES ARE TO BE OF AN APPROVED CERAMIC MATERIAL. (UNLESS OTHERWISE SPECIFIED BY CONTRACT SUPERVISOR)
6. TACTILE COLOR MUST BE IVORY, WITH A CERTIFICATE OF LUMINANCE COMPLIANCE (TO AS1428 IN WET AND DRY CONDITIONS) TO BE SUPPLIED BY THE MANUFACTURER
(UNLESS OTHERWISE SPECIFIED BY THE CONTRACT SUPERVISOR).
7. MANUFACTURER MUST SUPPLY SPECIFICATION FOR INSTALLATION OF TACTILES. INSTALLATION MUST BE IN ACCORDANCE WITH THIS SPECIFICATION.
(UNLESS OTHERWISE SPECIFIED BY THE CONTRACT SUPERVISOR).

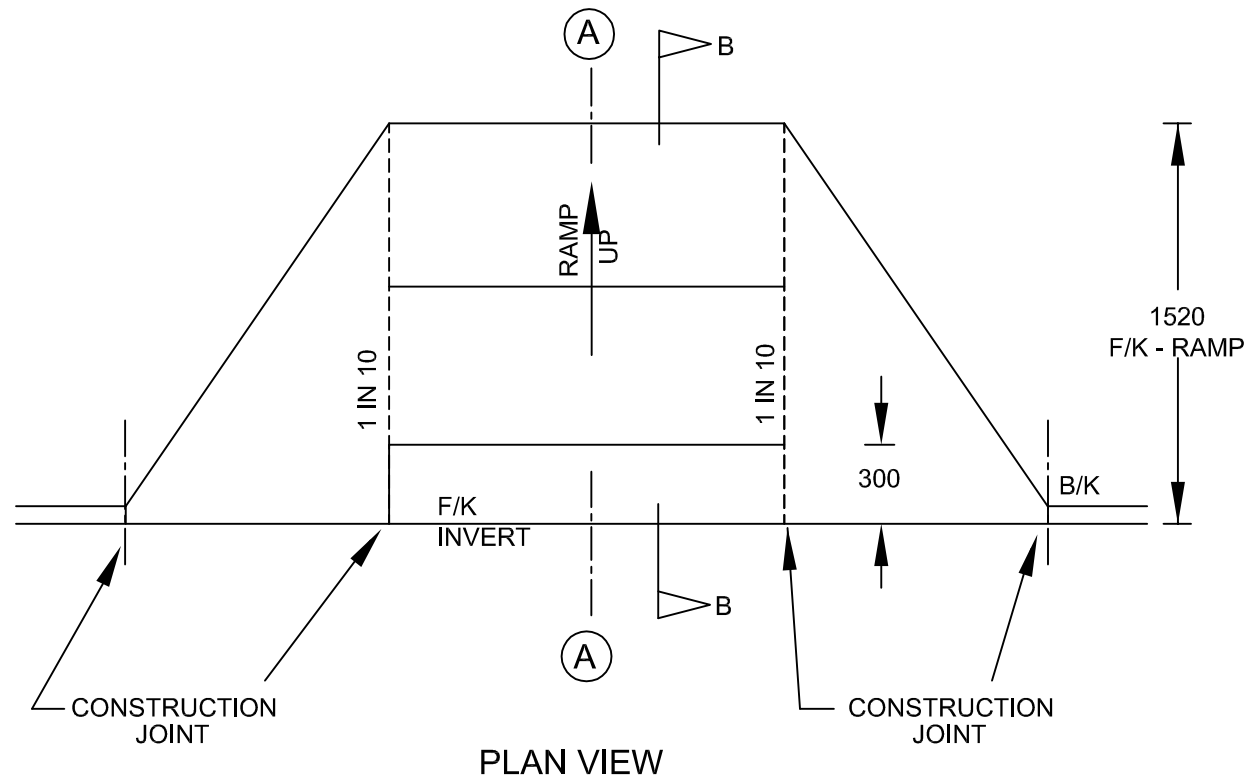


PLAN VIEW

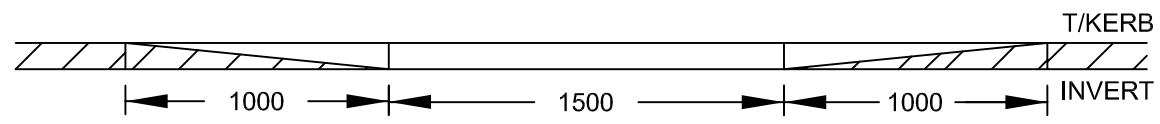


ELEVATION A

THE ALIGNMENT OF TACTILE PATTERNS TO POINT IN DIRECTION OF PEDESTRIAN TRAVEL ACROSS ROADWAY.

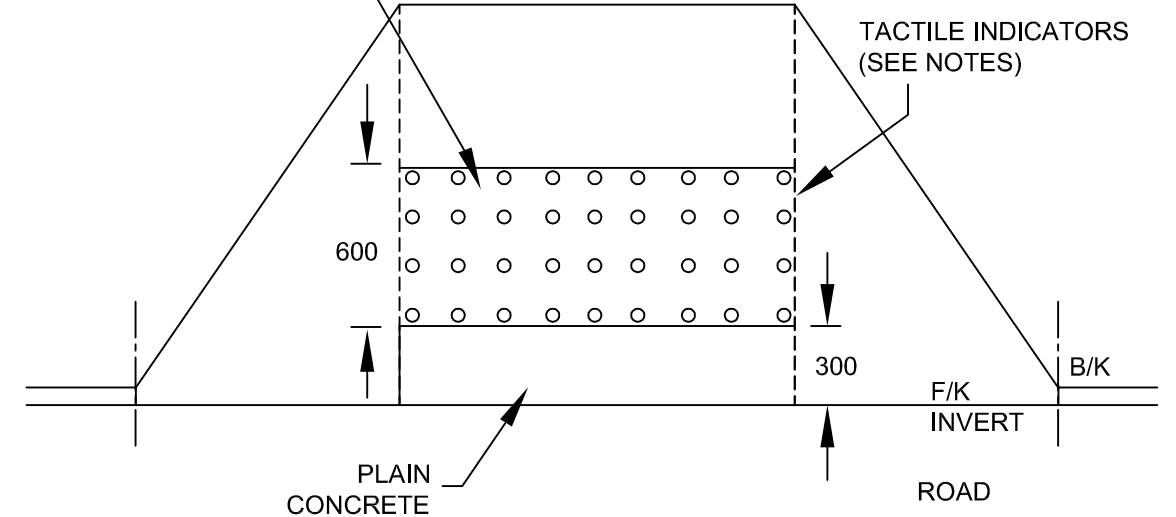

PLAN VIEW

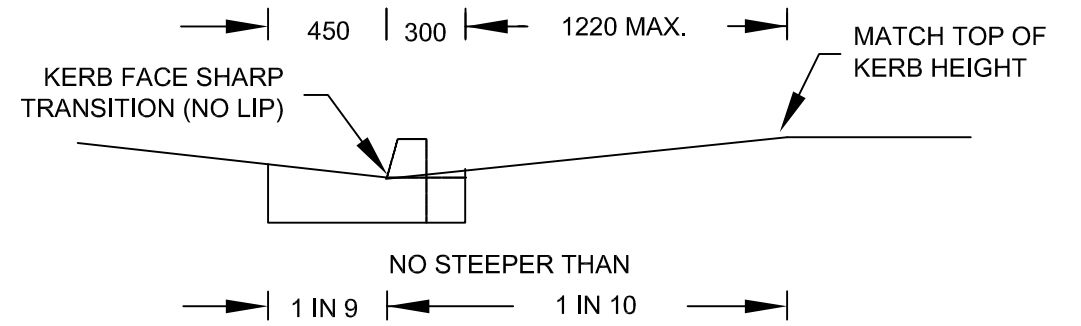

SECTION BB

CITY OF BALLARAT

No.	AMENDMENTS	DATE
1	ADDED TACTILE INDICATORS	DEC 00
2	CHANGED NOTES	APR 04
3	CHANGED CONSTRUCTION JOINTS	NOV 11
4	CONSTRUCTION NOTES ADDED	SEP 13

Approved by: _____
Date: _____

PEDESTRIAN KERB RAMP DETAIL WITH TACTILE INDICATORS



SCALE:
NOT TO SCALE
SHEET 1 OF 4
DRAWING NO:
SD-C4-1