


1. DOWELLED JOINT TO BE PLACED EVERY 15m AT BOTH SIDES OF DRIVEWAYS AND WHERE PEDESTRIAN LAYBACKS ARE CONSTRUCTED.
2. CONCRETE TO BE 25MPa AT 28 DAYS (BROOM FINISH) WITH F72 REINFORCEMENT PLACED 40mm FROM TOP SURFACE. 10mm DEFORMED BARS TO BE DOWELLED A MIN 150mm INTO EXISTING CONCRETE, AND 150mm INTO PROPOSED CONCRETE AT 450mm CENTRES

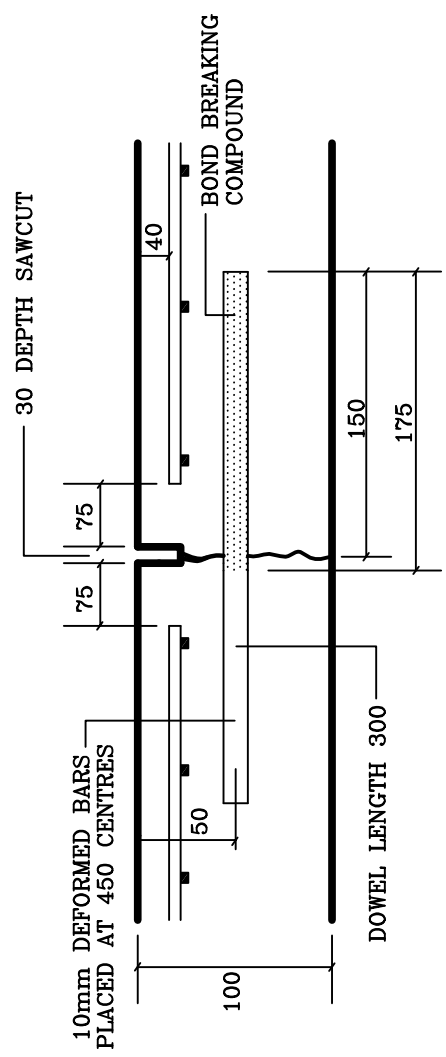

DOWELLED JOINT  
(ALL MEASUREMENTS IN mm)  
N.T.S

# CITY OF BALLARAT

## CONCRETE FOOTPATH WITH SPOON DRAIN

Approved by:

ALTERATION TO CONCRETE THICKNESS	SEPT 10
UPDATE NOTES AND DOWELLED JOINT DWG	OCT 11

No.	AMENDMENTS	DATE	Date:

